

Turnbuckles
Forged (Open Type)


DIN
1480

Spannschlösser, geschmiedet (offene Form)

Dimensions in mm

Details not specified are to be designed as appropriate.

SP Turnbuckle nut

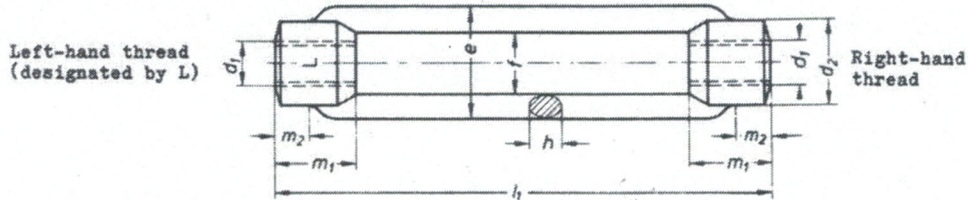

Designation of a turnbuckle nut SP with right and left-hand thread $d_1 = M 12$:

Turnbuckle nut SP M 12 DIN 1480

SP AE Turnbuckle (turnbuckle nut SP with welding ends AE)

Designation of a turnbuckle SP AE consisting of a turnbuckle nut with two welding ends with right and left-hand thread $d_1 = M 12$:

Turnbuckle SP AE M 12 DIN 1480

d_1	M 6	M 8	M 10	M 12	M 16	M 20	M 24	M 30	M 36	M 42	M 48	M 56
d_2	12	15	18	21	27	34	39	45	55	63	80	80
e	19	23	30	34	42	52	60	74	86	104	135	135
f	9	11	14	16	20	24	28	34	40	50	65	65
h min.	6	8	9	11	14	17	20	23	28	32	40	40
l_1	110	110	125	125	170	200	255	255	295	330	355	355
m_1	12	15	18	21	27	34	39	45	55	63	78	78
m_2 max.	6	8	9	11	14	17	20	23	28	32	39	39
Adjustability \approx	80	75	85	80	110	130	170	160	180	200	195	195

Technical conditions of delivery according to DIN 267

Material: Steel of at least 330 N/mm^2 ($\approx 34 \text{ kp/mm}^2$) tensile strength
Steel of higher strengths or specified materials by agreement.

Finish: Drop forged
Permissible variations according to forging quality F according to DIN 7526

Thread: Regular metric thread according to DIN 13
Tolerance on thread 7H according to DIN 13 Part 15

Hexagon nuts according to DIN 555 or DIN 934, with right and left-hand thread, are to be specially ordered.

Continued on page 2
Explanations on page 3